




How can EMEROX® Polyols help you improve your rigid foam applications?

EMEROX Polyols are engineered for performance and sustainability. Our polyols provide formulators and end-users with enhanced performance properties, increased efficiencies, and sustainability. They are excellent high renewable content raw materials for use in the manufacture of polyurethane and polyisocyanurate rigid foams.

The family of aromatic EMEROX Polyols is engineered to perform in a broad range of fire-rated and non-fire-rated rigid foam applications, utilizing both hydrocarbon and next-generation fluorocarbon foam blowing agents. Several grades offer improved low temperature insulation performance. Designed to provide excellent blowing agent compatibility and retention, rigid foams made using EMEROX Polyols exhibit improved foam yields and also display excellent compressive strength and dimensional stability properties.

PRODUCT NAME	HYDROXYL VALUE	VISCOSITY CP @25°C	ACID VALUE	FUNCTIONALITY (CALCULATED)	BIO-BASED CONTENT	DESCRIPTION
EMEROX® I 4701	230	7,500	≤ 1.5	2.3	48*	Designed for hydrocarbon blown PIR foam. Excellent pentane compatibility and efficiency. Excellent low temperature insulation performance.
EMEROX® I 4725	260	6,600	≤ 1.5	2.3	48**	Designed for hydrocarbon blown PIR foam. Excellent pentane compatibility and efficiency. Excellent low temperature insulation performance.
EMEROX® I 4730	305	8,000	≤ 1.5	2.3	48*	Designed for PIR/PUR, PiP and other rigid foam applications. Excellent fire performance with good volume/weight retention and char stability.
EMEROX® I 4733	320	5,300	≤ 1.5	2.4	64*	Designed for PIR, PiP and other rigid foam applications. Very good fire performance with enhanced functionality and foam mechanical properties.
EMEROX® I 4735	265	6,500	≤ 1.5	2.3	48*	Designed for PIR applications. Good hydrocarbon solubility. Good fire performance with foam swelling.
EMEROX® I 4737	370	4,000	≤ 1.5	2.3	45**	Designed for PiP and other rigid foam applications. High functionality / low viscosity.

*USDA Certified Biobased Product. ** Bio-based content is an estimate, pending final testing.



Key Benefits


EMEROX® I 4700 Series Polyols

- Aromatic content added for specific targeted applications
- Excellent low temperature insulation performance
- Excellent compatibility with various blowing agents (water, hydrocarbons, fluorocarbons)
- Improved blowing agent efficiency / yield
- Used as sole polyol in various rigid PIR and PUR foam systems
- Excellent foam fire performance (intumescence, not shrinkage)
- High renewable content (48%)

EMEROX® I 4730 Series Polyols

- Aromatic content added for specific targeted applications and benefits
- Good blowing agent compatibility
- Often offers improved compressive strengths vs. EMEROX® I 4700 Series Polyols
- Designed to be used as sole polyols; Low viscosity with a range of hydroxyl values
- Superior fire performance (intumescence, not shrinkage)
- High renewable content (45 - 64%)


Pentane Blowing Efficiency

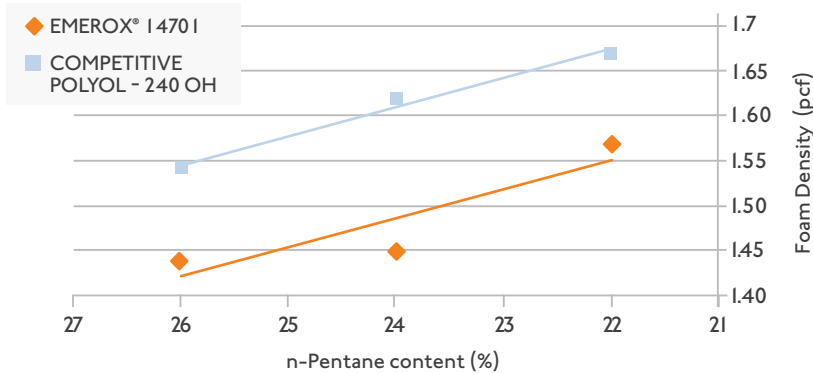

Aromatic-containing EMEROX® Polyols are designed to work better with blowing agents.

EMEROX® I 470 I requires ~15% less n-pentane than a typical competitive polyol.

Initial Thermal Conductivity vs Temperature

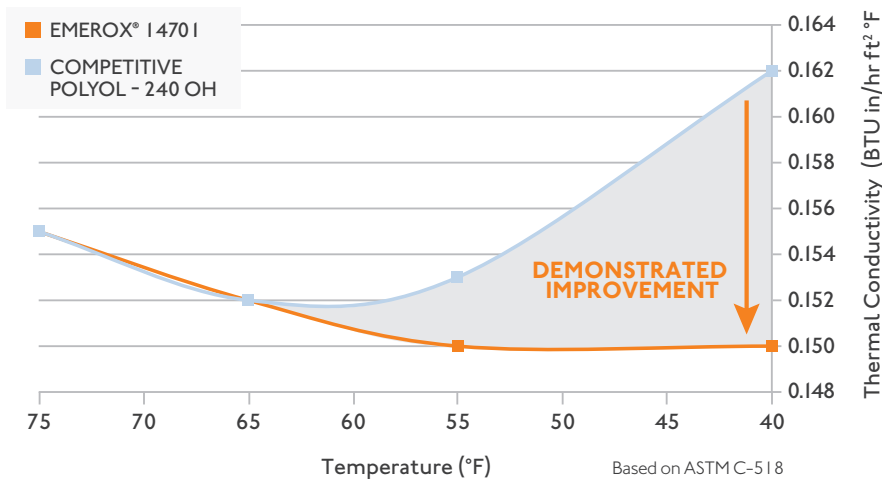

EMEROX® I 470 I offers improved low temperature thermal conductivity compared to a typical competitive polyol in n-pentane blown foams.

To request a sample or to find out more about our aromatic EMEROX® Polyols for rigid foam, contact EFP.Americas@emeryoleo.com or visit www.emeryoleo.com/polyols

Disclaimer: The content in this document is provided on an "as is" and "as available" basis purely for informational purposes and, unless and to the extent specifically agreed otherwise for a sales transaction, does not constitute any warranty, whether express, implied or statutory, including but not limited to warranties or guarantees of merchantability, fitness or suitability for a particular purpose nor any representations of a binding nature. EMERY OLEOCHEMICALS EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE SUITABILITY OF THE PRODUCTS FOR ANY SPECIFIC OR PARTICULAR PURPOSES INTENDED BY THE USER. Suggestions for the use and application of the products and guide formulations are for informational purposes only and you are advised to carry out any necessary steps to test the suitability of the products for your intended processes and purposes. You are solely responsible for compliance with all applicable laws and regulations in use of the products including any third party intellectual property rights and shall bear all liability or risk arising from use of the products. All indications marked with a TM or ® symbol are trademarks belonging to legal entities within the Emery Oleochemicals group of companies.